

HI-SCAN 6040aTiX

HEIMANN X-RAY INSPECTION SYSTEM



Feature Highlights

- Automatic detection of explosives in carry-on baggage
- Analysis of Z_{eff} and density using independent views
- Maximum baggage throughput / real time evaluation
- Proven, ergonomic operating concept is retained
- Two high-resolution and detailed views (Dual View)
- X-ray generator with optimized spectrum
- High resolution XADA sensor technology
- Fully integratable in networks for system management, archiving, image distribution and TIP functionalities

HI-SCAN 6040aTiX is the first system to allow explosives detection at security checkpoints.

HI-SCAN 6040aTiX uses several, independent multi-energy generators, each of which is connected to its own sophisticated and state-of-the-art X-ray sensor technology.

While the detection performance of HI-SCAN 6040aTiX is far superior to that of other automatic systems, the rate of false alarms has been considerably reduced through the use of optimized algorithms.

Using advanced computer technologies, even complex analyses will be carried out in

real-time without hampering usual checkpoint measures.

The operating concept of the proven HISCAN series has been retained which guarantees an optimum passenger throughput at checkpoints.

The two detailed views (Dual View) available to carry out manual analysis support the quick and reliable evaluation process.

HI-SCAN 6040aTiX - increased security by innovative technology.

Technical Data HI-SCAN 6040aTiX

General Specifications

Tunnel dimensions	620 (W) x 418 (H) [mm] • 24.4" (W) x 16.5" (H)
Max. object size	615 (W) x 410 (H) [mm] • 24.2" (W) x 16.1" (H)
Conveyor height ¹⁾	approx. 800 mm [31.5"]
Conveyor speed with 50 Hz / 60 Hz mains frequency ²⁾	standard: 0.2 [m/s]
Max. conveyor load even distributed over the whole conveyor	160 kg [352 lbs]
Resolution (wire detectability) ³⁾	standard: 40 AWG (0.08 mm Cu) • typical: 41 AWG (0.07 mm Cu)
Penetration (steel) ³⁾	standard: 35 mm • typical: 37 mm
X-ray dose (typical)	HI-MAT: 10 µSv (1 mrem)
Film safety	garanteed up to ISO 1600 [33 DIN] with a maximum of 5 inspections
Operating cycle	100 %, no warm-up procedure required

X-ray Generator

X-ray generators	4
Anode voltage • cooling	160 kV cp • hermetically sealed oil bath
Beam direction	from different directions, horizontal and vertical

Image Generating System

X-ray converter	MultiView detector system with large-scale integrated, monolithic amplifier
Grey levels stored	4096
Image presentation	B/W, color, HI-MAT Plus
Digital video memory	1280 x 1024 / 24 bit
Image evaluation functions	VARI-MAT, O ² , OS, HIGH, LOW, NEG
Monitor	stepless, electronic Zoom: enlargement: up to 16 times 17" color monitors (2), emission meets MPR II and TCO 99 standards, other monitors on request

Additional Features

Functions	fading-in of date/time, luggage counter, user id-number, luggage marking system (acoustic), display of operating mode, REVIEW-feature (to recall previously visible image areas), zoom overview, free programmable keys, USB 2.0 interface, stepless zoom
Options	HI-TIP, HI-SPOT, SEN, XPlore, IMS (image management system), Xport, Media Bay for RIDA [250 GB], ZIP module or CD/RW module

Installation Data

X-ray leakage	meets all applicable laws and regulations with respect to X-ray emitting devices
CE labelling/directives	in compliance with directives 98/37/CEE, 72/23/CEE, 89/336/CEE developed in accordance with directives IEC, UN, UL, CSA
Sound pressure	< 65 dB(A)
Operating-/storage temperature ⁴⁾	0° - 40°C / -20°C - +60°C
Humidity	10% - 90% (not condensing)
Power supply	standard: 120, 200, 230, 240 VAC +10% / -15% • 50 Hz / 60 Hz ± 3 Hz
Power consumption	max. 1.92 kVA
Protection class	IP 20 / IP 43
Dimensions • weight ⁵⁾	3300 (L) x 1310 (W) x 1400 (H) [mm] • approx. 1600 kg 129.9" (L) x 51.6" (W) x 55.1" (H) • approx. 3528 lbs
Mechanical construction	steel construction with steel panels, mounted on roller castors standard color(s): RAL 7016 (dark grey) / B11-W1 (blue)


¹⁾ approx. values (adjustable)

²⁾ 0.24 m/s on request

³⁾ Cond.: steel stepwedge, copper wires, belt speed 0.2 m/s

⁴⁾ extended temperature range on request

⁵⁾ without operator console, monitors etc.

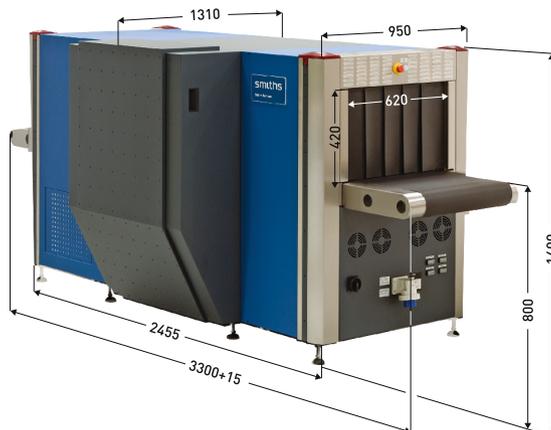

Germany

Smiths Heimann GmbH
Im Herzen 4
65205 Wiesbaden
T: +49 (0)611 9412-0
F: +49 (0)611 9412-229
mail.germany@smiths-heimann.com
http://www.smiths-heimann.com

France

Smiths Heimann S.A.S.
36, rue Charles Heller
94400 Vitry sur Seine
T: +33 (0)1 55 53 55 55
F: +33 (0)1 46 80 34 99
mail.france@smiths-heimann.com
http://www.heimanncargovision.com

UK

Smiths Detection International UK
Unit 3, Odhams Trading Estate
Watford
Herts WD24 7RY
T: +44 (0) 1923 294400
F: +44 (0) 1923 294401
mail.uk@smiths-heimann.com

USA

Smiths Detection Inc.
30 Hook Mountain Road
Pine Brook, NJ 07058
T: +1 973 830-2100
F: +1 973 830-2200
mail.usa@smiths-heimann.com

Canada

Smiths Detection Montréal Inc.
3225 Francis-Hughes, Suite 100
Canada H7L 5A5
T: +1 (450) 967-0010
F: +1 (450) 967-0015
mail.canada@smiths-heimann.com

Singapore

Smiths Detection Asia Pacific Pte. Ltd.
100 Beach Road
#20-06 Shaw Towers
Singapore 189702
T: +65 6 466-1700
F: +65 6 469-2506
mail.singapore@smiths-heimann.com

